


# Kranwaagen-Zubehör

---

Verbindungsringe, Haken und Schäkel

Technisches Datenblatt




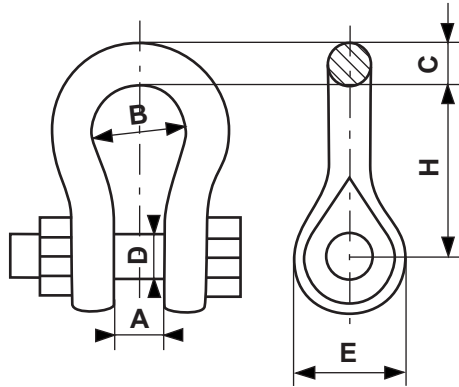

	Capacity (t)	Dimensions (mm)						Tolerance H (mm)	Weight (kg)
		A	B	C	D	E	H		
<b>GR3</b>	3,25	27	43	16	19	40	70	3	1
<b>GR6</b>	6,5	37	58	22	26	55	97	6	2
<b>GR9</b>	9,5	46	74	29	32	67	124	6	3,5
<b>GR12</b>	12	52	83	32	35	76	137	6	5
<b>GR17</b>	17	60	98	38	41	92	166	6	9
<b>GR25</b>	25	73	127	45	51	110	204	6	14
<b>GR35</b>	35	83	146	51	57	127	225	6	21
<b>GR55</b>	55	105	184	63	70	153	302	20	43


\* Tolerance +/- 5 mm

# GOA

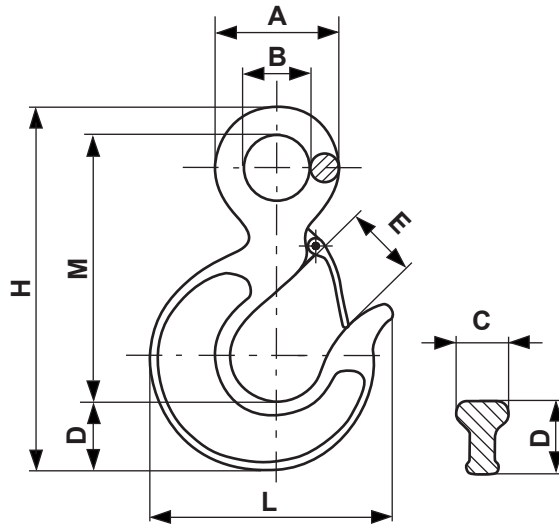

	Capacity (t)	Dimensions (mm) *								Weight (kg)
		A	B	C	D	E	H	L	M	
<b>GOC1</b>	1,6	53	27	21	28	25	143	90	116	0,6
<b>GOC3200</b>	3,2	77	40	30	40	31	202	125	160	1,6
<b>GOA8</b>	8	98	51	40	48	43	256	160	187	4
<b>GOA11</b>	11	120	62	45	58	50	316	192	230	7
<b>GOA16</b>	16	138	72	55	64	56	356	222	256	10
<b>GOA22</b>	22	169	89	65	76	80	434	280	318	17
<b>GOA30</b>	30	180	90	82	102	88	505	320	357	30


\* Tolerance +/- 5 mm

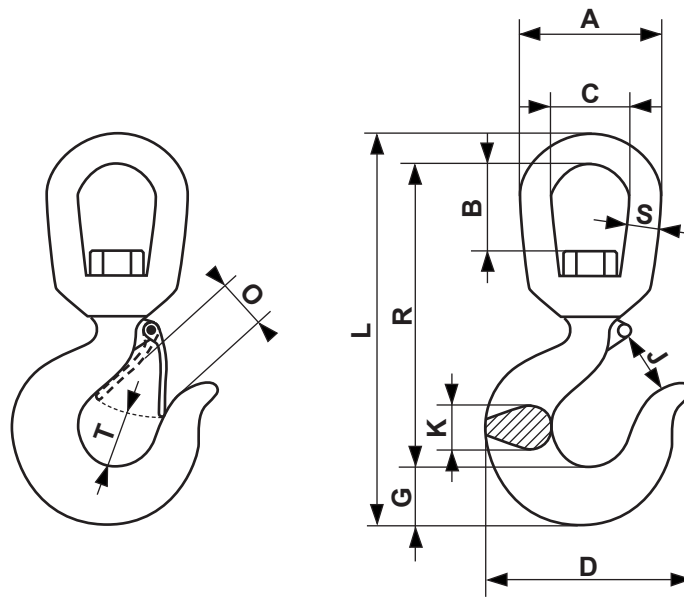

	Capacity (t)	Dimensions (mm) *											Weight (kg)	
		A	B	C	D	G	J	K	L	O	R	S		T
<b>GG1T5</b>	1,5	80	49	46	92	26,5	32	22,5	210	22	165	17	23,5	1
<b>GG4</b>	5	105	60	60	125	41	40	31	275	31	215	22	37	5
<b>GG7</b>	8	127	76	75	155	49	59	42	335	41,5	260	26,5	42	8
<b>GG11</b>	11,5	148	72	90	192	58	65	42	400	47	310	29	50	10
<b>GG15</b>	16	155	89	90	221	70	76	60	440	58	350	32	61,5	11
<b>GG22</b>	22	200	111	116	279	84,5	90	67	580	74	450	41	60,5	23
<b>GG30</b>	30	235	116	135	346	103	115	90	670	92,5	520	50	96,5	32

\* Tolerance +/- 5 mm



# CA



	Capacity (t)	D Ø mm	L mm *	l mm *	Weight (kg)
<b>CA2</b>	2	15	105	60	0,4
<b>CA4</b>	5	20	135	75	0,8
<b>CA8</b>	8	25	180	100	2,1
<b>CA15</b>	18	33	215	130	4,2
<b>CA30</b>	32	45	340	180	13
<b>CA40</b>	40	48	355	185	16

\* Tolerance +/- 5 mm



# COMPATIBILITY

		GG1T5	GG4	GG7	GG11	GG15	GG22	GG30
	Max.(t)	1,5	5	8	11,5	16	22	30
GR3	3,25	•	*	*	-	-	-	-
GR6	6,5	-	•	•	•	*	-	-
GR9	9,5	-	•	•	•	•	*	-
GR12	12	-	*	*	•	•	•	*
GR17	17	-	-	-	-	-	•	•
GR25	25	-	-	-	-	-	*	*
GR35	35	-	-	-	-	-	-	-
GR55	55	-	-	-	-	-	-	-



	GOC1	GOC3200	GOA8	GOA11	GOA16	GOA22	GOA30
	1,6	3,2	8	11	16	22	30
	-	*	•	-	-	-	-
	-	-	-	•	*	-	*
	-	-	-	-	•	•	•
	-	-	-	-	-	•	•
	-	-	-	-	-	-	*
	-	-	-	-	-	-	-
	-	-	-	-	-	-	-
	-	-	-	-	-	-	-






		CA2	CA4	CA8	CA15	CA30	CA40
	Max.(t)	8	5	8	18	32	40
GR3	3,25	•	•	*	-	-	-
GR6	6,5	•	•	•	*	-	-
GR9	9,5	•	•	•	•	*	-
GR12	12	•	•	•	•	•	*
GR17	17	•	•	•	•	•	•
GR25	25	*	•	•	•	•	•
GR35	35	-	•	•	•	•	•
GR55	55	-	-	•	•	•	•


\* upon request only

• compatible

- not compatible

		GG1T5	GG4	GG7	GG11	GG15	GG22	GG30
	Max.(t)	1,5	5	8	11,5	16	22	30
CA2	2	•	•	•	•	*	-	-
CA4	5	*	•	•	•	•	•	-
CA8	8	-	•	•	•	•	•	•
CA15	18	-	*	•	•	•	•	•
CA30	32	-	-	-	*	•	•	•
CA40	40	-	-	-	-	•	•	•



	GOC1	GOC3200	GOA8	GOA11	GOA16	GOA22	GOA30
	1,6	3,2	8	11	16	22	30
	•	•	•	•	*	-	-
	•	•	•	•	•	•	-
	*	*	•	•	•	•	•
	-	-	*	•	•	•	•
	-	-	-	*	•	•	•
	-	-	-	*	•	•	•

\* upon request only

• compatible

- not compatible